

Print & Cut  
LED-UV Curable Inkjet Printer

Speedy and easy printing and cutting by just one unit.  
Upcoming line of UCJV300 series!

UCJV300series  
"High—spec" models applying the 4-layer/5-layer print

UCJV300-75  
0.8m width

Printable up to 800mm width  
Small foot-print and versatile model covering wide range of stickers, labels and point of sales materials making.

UCJV300-107  
1.1m width

Printable up to 1090mm width  
Quick printing and cutting to apply a B0 size poster of commercial print besides promotional items of various type of media.

UCJV300-130  
1.3m width

Printable up to 1361mm width  
Suitable for both signage and point of marketing materials.  
Quick processing without ink drying time by UV-LED to reduce the working time significantly for orders in short delivery time.

UCJV300-160  
1.6m width

Printable up to 1610mm width  
Applicable to large format sign, long-sized sticker, vehicle wrapping films, too  
Reliable functions for Print & Cut to wide sized print production.

Specifications

Item		UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160
Print head		On-demand piezo head			
Print resolution		300dpi, 600dpi, 900dpi, 1200dpi			
Droplet size		Min. 7pl, Max. 28pl			
Head gap		3 degrees adjustable (2.0/2.5/3.0mm) by manual			
Ink	Type	LED-UV ink			
	Color	LUS-170(C,M,Y,K,Lc,Lm,W / C,M,Y,K,Ci,W / C,M,Y,K) LUS-200(C,M,Y,K,W / C,M,Y,K)			
	Capacity	IL (Bottle supply)			
Max. print width		800mm (31.5in)	1,090mm (42.9in)	1,361mm (53.5in)	1,610mm (63.4in)
Max. media width		810mm (31.9in)	1,100mm (43.3in)	1,371mm (54.0in)	1,620mm (63.8in)
Media thickness		1.0mm or less			
Media roll outer diameter		250mm or less			
Media roll weight		40kg (88.2lb) or less			
Cut speed		Max. 300mm / s (420mm / s in 45 degrees direction)			
Cut pressure		10 - 450gf			
Cutter types		Eccentric cutter, Blade for small character, Blade for reflective sheet Blade for fluorescent sheet, Standard blade for vinyl			
Safety standard		VCCI Class A / FCC Class A / Compliant with UL 60950-1, ETL CE Marking ( EMC, Low Voltage, Machinery Directive ), RoHS CB Report / REACH · ENERGY STAR / RCM			
Interface		USB2.0 / Ethernet1000 BASE-T			
Power supply		Single phase AC100 - 120/200-240V ± 10%, 50 / 60Hz ± 1Hz			
Power consumption		AC100V : 1.44kW / AC200V : 1.92kW or less			
Operational environment		Temperature : 20-30 degC / 68-86 degF, humidity : 35-65% Rh ( No condensing )			
Outside dimensions ( W × D × H )	mm	2,090 × 776 × 1,475	2,380 × 776 × 1,475	2,650 × 776 × 1,475	2,900 × 776 × 1,475
	in	82.3 × 30.6 × 58.1	93.7 × 30.6 × 58.1	104.3 × 30.6 × 58.1	114.2 × 30.6 × 58.1
Weight	kg/lb	139 / 306.4	156 / 343.9	172 / 379.2	188 / 414.5

\*Specifications, designs and dimensions stated in this list may be subject to change without notice due to technical improvement etc.

Supplies

Product name	Color	Item code	Remarks
LUS-170	Cyan	LUSI7-C-BA	IL bottle
	Magenta	LUSI7-M-BA	
	Yellow	LUSI7-Y-BA	
	Black	LUSI7-K-BA	
	Light Cyan	LUSI7-LC-BA	
	Light Magenta	LUSI7-LM-BA	
	White	LUSI7-W-BA	
LUS-200	Clear	LUSI7-CL-BA	IL bottle
	Cyan	LUS20-C-BA	
	Magenta	LUS20-M-BA	
	Yellow	LUS20-Y-BA	
	Black	LUS20-K-BA	
	White	LUS20-W-BA	

Print speed

UCJV300 Series (4C 1Layer) LUS-170/LUS-200				
Model		UCJV300-75	UCJV300-107	UCJV300-130 UCJV300-160
Print mode		Print speed (㎡/h)		
Draft	300×600 4P Bi/STD	18.0	21.5	24.0 25.8
High Speed	300×900 6P Bi/STD	14.2	17.0	19.1 20.6
Standard	600×600 8P Bi/Hi	10.8	13.0	14.6 15.7
Quality	600×1200 16P Bi/Hi	5.6	6.7	7.5 8.0
High Quality	1200×1200 32P Bi/Hi	3.5	4.1	4.5 4.7

UCJV300 Series (5C/6C/7C 1Layer) (LUS-170-6C/7C LUS-200-5C)				
Model		UCJV300-75	UCJV300-107	UCJV300-130 UCJV300-160
Print mode		Print speed (㎡/h)		
Draft	300×600 8P Bi/STD	9.6	11.3	12.6 13.4
High Speed	300×900 12P Bi/STD	7.4	8.9	9.9 10.6
Standard	600×600 16P Bi/Hi	5.6	6.7	7.5 8.0
Quality	600×1200 32P Bi/Hi	2.9	3.4	3.8 4.0
High Quality	1200×1200 32P Bi/Hi	1.8	2.1	2.3 2.4

UCJV300-160 (5C/6C/7C Multi layers) (LUS-170-6C/7C LUS-200-5C)				
Model		2 layer	3 layer	4 layer 5 layer
Print mode		Print speed (㎡/h)		
High Speed	300×900 12P Bi	5.4	3.6	2.7 2.1
Standard	600×600 16P Bi	4.0	2.7	2.0 1.6
Quality	600×1200 32P Bi	2.0	1.3	1.0 0.8
High Quality	1200×1200 32P Uni	1.2	0.8	0.6 0.5

\*La fábrica se reserva el derecho de modificar las especificaciones sin previo aviso | Ver.: 23-08-2024

Carlos E. Pellegrini 6082, CABA  
+54 9 11 6672 2420  
ventas@isdsa.com.ar  
www.isdsa.com.ar

Instagram Facebook Twitter YouTube  
/isdsaargentina



For  
SIGN  
GRAPHICS

Print & Cut LED-UV Curable Inkjet Printer



UCJV300series  
UCJV300-75/107/130/160

Leading the Future of Sign Graphics through  
UV Innovation







# UCJV300series

Leading the Future of Sign Graphics through  
UV Innovation

## Immediate processing and deliver are available by UV-LED.

With the UV ink property of immediate curing upon UV light irradiation, no drying time is required. The post-processing and sign applying are possible instantly. Required time for production is saved to be possible to undertake even an order of tight scheduled work. It is immune from ink blocking while printing by multi layers or using white ink. There is no necessity to mind media stains nor to attend by operator.

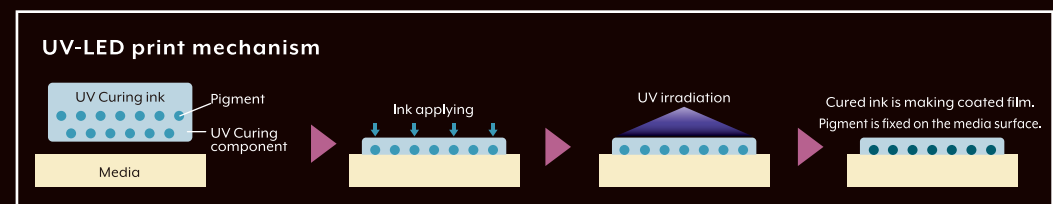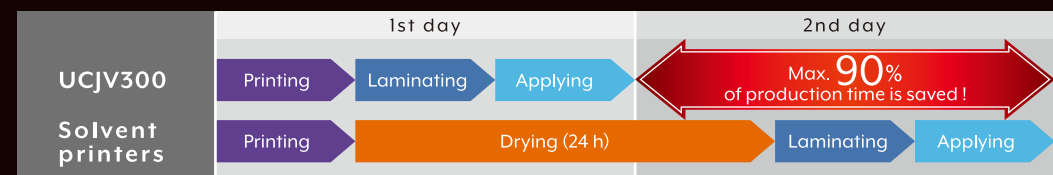

## Newly developed environmentally friendly UV ink, [LUS-170]

The new [LUS-170] ink is environmentally friendly, generates almost no VOCs and can be cured without the use of ozone-causing short-wavelength UV. The yellow ink of [LUS-170] is eco-friendly and nickel-free though the nickel is used in some general yellow inks.

## Flexible UV ink with the stretch ability up to 200%, [LUS-200]

The [LUS-200] ink has the stretch ability up to 200%. This capability suits stretch film applications such as vehicle wrapping. Printed films can be applied onto curved surface successively without ink cracking. [LUS-170] and [LUS-200] gained the [GREENGUARD Gold] certification, which is based on most strict global standard of chemical substance diffusion.

The GREENGUARD Gold certification assures the product property conforms to schools and medical facilities.



## Printing is possible on a wide range of materials!

UV ink is printable to PVC and tarpaulin which are compatible with solvent, as well good matching with fabric, non specified ink receiving paper and PET. More varied applications with UCJV300 Series due to mountable white ink.



Shoji (japanese paper)



Banner flag




Wall paper  
( Illustration or letters print to the pattern printed wall paper)

## Immediate materializing an image idea by Print & Cut

[UCJV Series] are equipped with cutting function of high performance and high efficiency to be able to make labels, stickers and car wrapping film by one unit only.

[ID Cut] can help to cut easily even for multiple types data of small lot of each.

[ID Cut] is to print together ID (Barcode) for recognition of cutting details and media rotation with crop marks while placing the crop mark on the RIP. And then cut data of every print data is readable to start cutting automatically. Then with this function, cutting starts without any respective cutting order by operator at RIP software. It saves media losses by failure of data transmission.

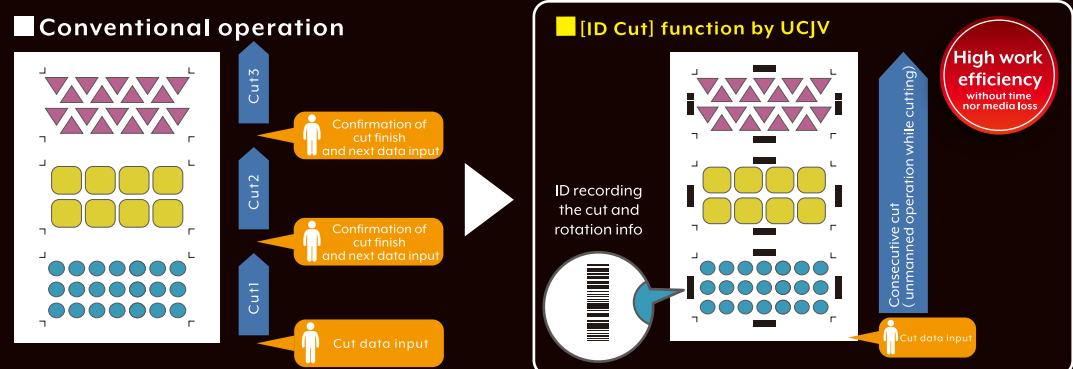

## Broad range of applications

Print & Cut with instant drying UV-curable ink can broaden the range of applications.

Store decorations, posters, labels, stickers, and point-of-sale items can all be produced with a single unit.

Integrated promotional approach will suit the method and image of marketing and expand business opportunities.



## UV Clear ink widening the scope of design and business possibility

LUS-170 Clear ink is available with UCJV300 Series.

The superior function [Mimaki Clear Control] equipped with UCJV300 Series can achieve beautiful clear printing suppressing the dust adherence and bubble generation by processing the clear ink print and UV-light irradiation simultaneously.

There are two types of print modes you can choose from depending on your purpose: [glossy finish] of sense of class given by shiny sheen and [matte finish] producing a muted matting effect.

Moreover, by installing RasterLink7 attached to the UCJV300 Series, [ARTISTA UV Texture Library] with 129 types of swatches in Adobe Illustrator can be used. The Library provides plenty of textures to widen the scope of design and business possibility.



Sizzling effect by glossy finish



Window display like frosted glass  
by matte finish




Expressive design to stimulate touching intention  
by clear texture

## Four-layer print [Day&Night Printing]

A very new advertising expression with showing different image effect between daytime and nighttime which can be created by four-layer print\*.

[Day & Night Printing], a visible design change is presented by backlighting of four-layer print of [Color]+[Black]+[White]+[Color]. A proposal of highly designed sign can be put forward without any retouches of current simple light box but just ON/OFF of internal lamp. It can make a graphic change or an illumination of specified area etc.

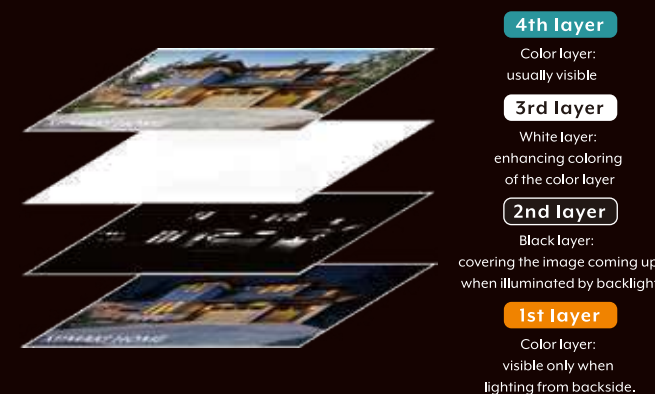

[Back light OFF]  
Visible image in daytime. Only 4th layer is visible.



[Back light ON]  
Visible image in nighttime. By backlighting, the color image of 1st layer is coming up.


## Multi-layer print for a new advertisement expression

## Five-layer print [Front&Back Printing]

Different printed design can appear on the "Front and Back" by one time print.

By printing on a transparent film with five layers, the [Front&Back Printing] of different design on the two sides is realized.

A different image of indoor and outdoor of one window sign, etc., it is a new proposal of more attractive sign with higher design property.

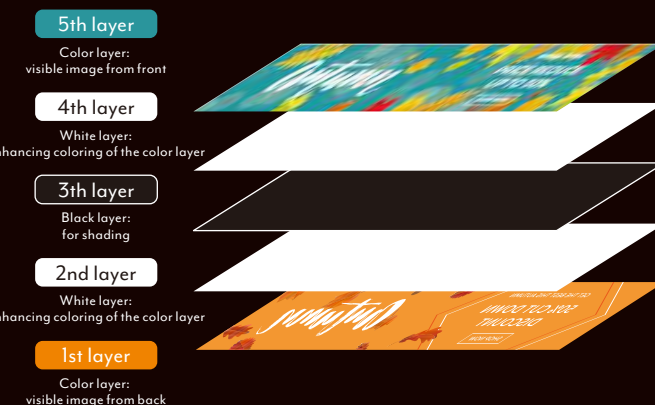

Outside



Inside

## UV-LED print enhancing the work efficiency

## Ecological newly developed ink

## A wide range of materials × UV ink

## Expression selectable UV Clear ink